© [redacted] AND PARKER, P.C. 2014

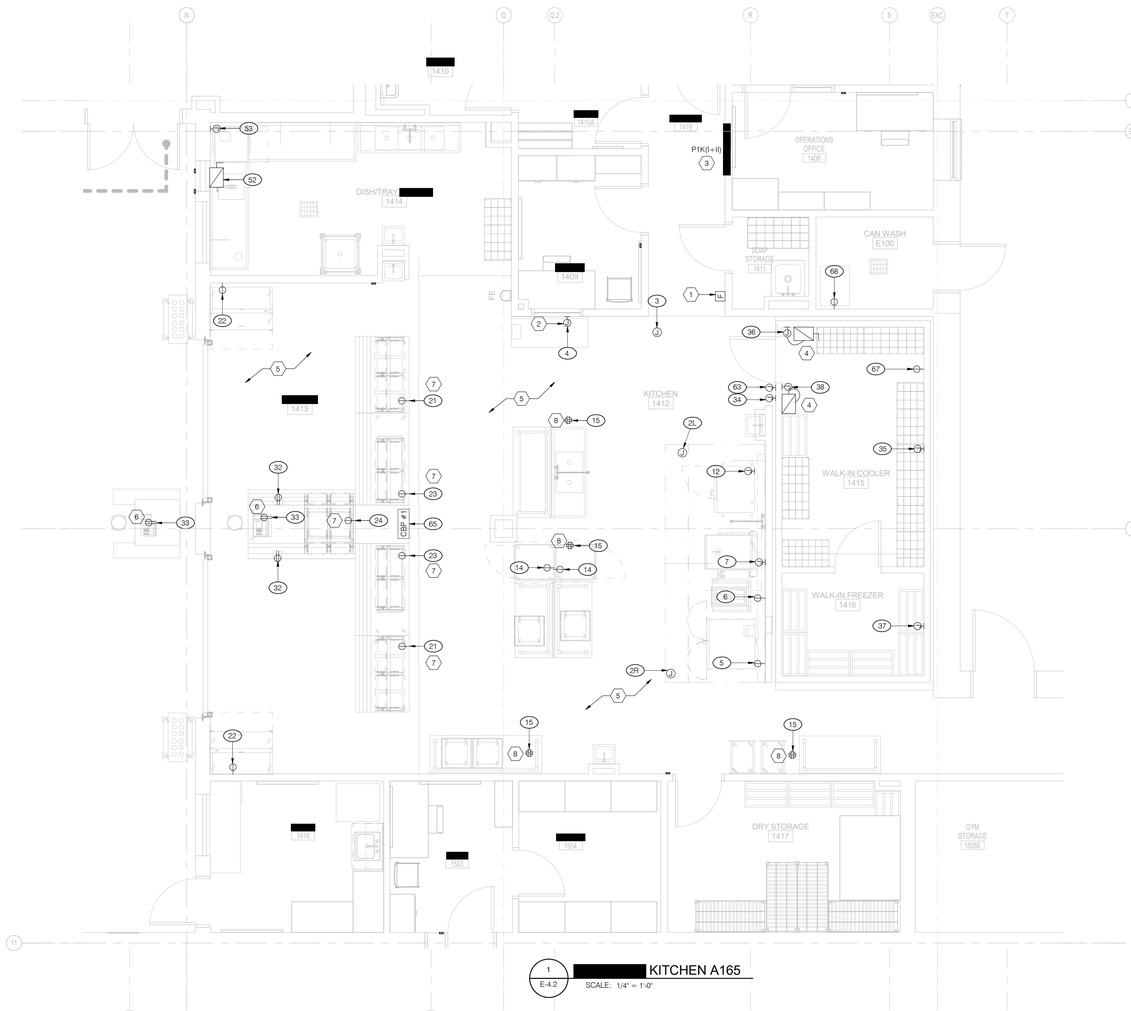

1 / E-4.2 [redacted] KITCHEN A165

SCALE: 1/4" = 1'-0"

KITCHEN EQUIPMENT ELECTRICAL NOTES

1. ALL OUTLETS AND CONNECTIONS SHOWN RELATE TO FOOD SERVICE FIXTURES AND EQUIPMENT ONLY. SEE ARCHITECTURAL/ENGINEERING PLANS FOR ADDITIONAL ELECTRICAL REQUIREMENTS.
2. THIS ELECTRICAL PLAN IS INTENDED TO SHOW ROUGH-IN OUTLET TYPES, AND CONNECTION POSITIONS AND LOAD REQUIREMENTS. VERIFY FINISH WALL PARTITION LOCATIONS WITH ARCHITECTURAL DRAWINGS.
3. ALL ELECTRICAL WORK FOR FABRICATED FOOD SERVICE EQUIPMENT SHALL BE COMPLETELY WIRED BY THE FABRICATION CONTRACTOR TO A COMMON JUNCTION BOX, PULL BOX, OR CONTROL PANEL ON THE EQUIPMENT IN AN ACCESSIBLE POSITION. FINAL CONNECTIONS TO EQUIPMENT JUNCTION BOX OR PULL BOX, AND ALL ELECTRICAL WORK FROM MAIN PANEL BOARDS SHALL BE BY THE ELECTRICAL CONTRACTOR.
4. FINAL CONNECTIONS TO ALL FOOD SERVICE EQUIPMENT SHALL BE PERFORMED BY THE ELECTRICAL CONTRACTOR, INCLUDING MATERIALS.
5. PIPING, CONDUIT, AND SIMILAR CONSTRUCTION, LOCATED OUTSIDE A WALL, MUST BE INSTALLED SO THAT THERE IS A MINIMUM OF 3/4 INCH SPACE BETWEEN IT AND THE WALL.
6. ELECTRICAL CONTRACTOR (E.C.), OR EQUIVALENT, SHALL FURNISH AND INSTALL THE FOLLOWING:

A. ALL JUNCTION BOXES, ELECTRICAL OUTLETS, COVER PLATES, SWITCHES, ETC. NOT BUILT INTO FIXTURES OR EQUIPMENT. ALL OUTLETS, JUNCTION BOXES, COVER PLATES, ETC. IN DISHROOMS AND SIMILAR WET LOCATIONS OR AS INDICATED ON SCHEDULE SHALL BE MOISTURE AND WATER PROOF.

B. ALL PLUGS AND CORDS AS NOTED ON SCHEDULE. ALL CORDS SHALL BE N.E.M.A. RATED AND U.L. APPROVED FOR MANUFACTURED AND FABRICATED EQUIPMENT.

C. SHUNT-TRIP CIRCUIT BREAKERS OR DISCONNECTS FOR FIRE CONTROL SYSTEM SHUT-OFF OF FOODSERVICE EQUIPMENT BENEATH HOODS/VENTILATORS AS REQUIRED BY N.F.P.A.-96, LATEST EDITION, AND LOCAL CODES.

D. DISCONNECTS OR OTHER DEVICES AS REQUIRED BY CODES.

7. FOR DISCONNECTS WHEN APPLICABLE, ELECTRICAL CONTRACTOR SHALL PROVIDE CONDUIT AND WIRING, INSTALL ELECTRICAL COMPONENTS (PROVIDED BY K.E.C.), AND INTERWIRE BETWEEN THE FOLLOWING:

A. REMOTE REFRIGERATION SYSTEMS TO EVAPORATOR COILS.

B. WALK-IN COOLER/FREEZER LIGHTS (RUN CONDUIT ABOVE COMPARTMENT CEILING).

C. REMOTE WALK-IN COOLER/FREEZER ALARM SYSTEMS (WHEN USED).

D. CONTROL PANELS TO WATER-TYPE VENTILATORS AND EXHAUST/SUPPLY FANS PER MANUFACTURER'S INSTRUCTIONS.

E. KITCHEN EXHAUST HOODS/VENTILATORS TO FIRE CONTROL SYSTEM AND SHUT-OFFS.

GENERAL DRAWING NOTES

1. REFER TO DRAWING E-0.1G/E-0.1H FOR ELECTRICAL GENERAL NOTES, GENERAL DEMOLITION NOTES, LEGEND AND ABBREVIATIONS. REFER TO DRAWING E-5.1G/E-5.1H FOR POWER RISER DIAGRAM, E-6.2G/H THRU E-6.5G/H FOR PANEL SCHEDULES.
2. REFER TO MECHANICAL/PLUMBING DRAWINGS FOR EXACT MECHANICAL/PLUMBING EQUIPMENT LOCATIONS.
3. ALL EQUIPMENT INSTALLED UNDER THE KITCHEN EQUIPMENT HOOD MUST BE PROVIDED WITH SHUNT TRIP CIRCUIT BREAKER AND TIED IN WITH THE HOOD FIRE SUPPRESSION SYSTEM.
4. FIELD COORDINATE THE EXACT LOCATION OF ALL KITCHEN EQUIPMENT WITH THE FOOD SERVICE CONSULTANT'S LAYOUT AND DRAWINGS.
5. PRIOR TO ANY INSTALLATION, COORDINATE AND COMPLY WITH THE KITCHEN EQUIPMENT MANUFACTURER'S REQUIREMENTS AND RECOMMENDATIONS.
6. UNLESS OTHERWISE NOTED IN THE PLAN ALL RECEPTACLES IN KITCHEN SHALL BE OF GFI TYPE.

KEY NOTES

1. ANSUL FIRE PROTECTION SYSTEM PULL STATION FOR KITCHEN EXHAUST HOOD. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH KITCHEN EQUIPMENT VENDOR PRIOR TO ROUGH-IN.
2. JUNCTION BOX FOR FIRE SUPPRESSION SYSTEM. COORDINATE EXACT LOCATION WITH KITCHEN EQUIPMENT VENDOR PRIOR TO INSTALLATION.
3. PROVIDE STAINLESS STEEL PLATE COVER.
4. PROVIDE 30A-2P+S/N-240V DISCONNECT SWITCH FOR CONDENSING UNIT. COORDINATE WITH MECHANICAL DRAWINGS FOR EXACT EQUIPMENT LOCATIONS PRIOR TO INSTALLATION.
5. UNLESS OTHERWISE NOTED IN THE PLAN ALL RECEPTACLES IN KITCHEN SHALL BE OF GFI TYPE.
6. PROVIDE 3/4" EMPTY CONDUIT FROM EACH CASH REGISTER OUTLET TO NEAREST WALL AND UPTO ACCESSIBLE CEILING SPACE FOR DATA CABLING AND EXTEND CONDUIT UPTO MANAGER OFFICE.
7. POWERED THROUGH LOAD CENTER CBP#1(ITEM #65)
8. QUAD RECEPTACLE FOR CEILING HUNG POWER REELS. COORDINATE WITH ARCHITECT/EQUIPMENT VENDOR FOR EXACT LOCATION AND MOUNTING REQUIREMENTS PRIOR TO INSTALLATION.

KITCHEN [redacted] CONNECTION SCHEDULE

ELEC. NO	QTY.	HP	KW	AMP	VOLT	[redacted]	CIR [redacted] AMP	CIR [redacted] POLE	[redacted] AND [redacted]	[redacted]	DESCRIPTION	ITEM NO						SHUNT TRIP	REMARKS
2L	1	-	-	5	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-1	[redacted] HOOD	2L				●			PROVIDE JUNCTION BOX AT +104" AFF.
2R	1	-	-	5	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-10	[redacted] HOOD	2R				●			PROVIDE JUNCTION BOX AT +104" AFF.
4	1	-	-	8	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-31	[redacted] HOOD CONTROL PANEL	4				●		●	PROVIDE JUNCTION BOX AT +104" AFF.
3	1	-	-	-	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-50	FIRE [redacted] SYSTEM	3				●			PROVIDE JUNCTION BOX AT +96" AFF.
5	1	-	-	4	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-4	[redacted] DECK CONVECTION OVEN-GAS	5	●					●	PROVIDE NEMA 5-20R AT +11 3/4" AFF
6	1	-	7.0	22	208	3	30	3	3 #10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-19,21,23	[redacted] HEAT	6	●					●	PROVIDE OUTLET +2' 8" AFF.
7	1	-	-	1	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-5	[redacted]	7				●		●	PROVIDE NEMA 5-20R & JUNCTION BOX AT +16" AFF.
12	1	-	0.009	25	208	1	40	2	2 #8 AWG + 1 #10 AWG G IN 1" C.	P1K-51,53	[redacted] OVEN	12				●		●	PROVIDE JUNCTION BOX AT +24" AFF.
14	2	-	2.1	18	120	1	30	1	2 #10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-8 P1K-52	[redacted] HOT FOOD CABINET	14	●						PROVIDE NEMA 5-20R AT 24" AFF. POWER VIA #15.
15	4	-	-	18	120	1	30	1	2 #10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-9, P1K-54, P1K-56 & P1K-58	CEILING HUNG CORD REEL	15			●				PROVIDE NEMA 5-20R RECEPTACLE AT +108" AFF.
21	2	-	4	20	208	1	30	2	2 #10 AWG + 1 #10 AWG G IN 3/4" C.	7	[redacted] 4-WELL HOT FOOD TABLE W/ FOOD [redacted] W/ [redacted] AND TRAY SLIDE	21	●						PROVIDE NEMA 14-30R RECEPTACLE AT +6" AFF. POWERED THROUGH ITEM #65.
22	2	1/3	1.26	11	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-11 P1K-60	[redacted] MILK [redacted]	22	●						PROVIDE RECEPTACLE AT +12" AFF.
23	2	1/4	-	7	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	7	[redacted] COLD PAN W/ FOOD GUARD W/ LIGHTS AND TRAY [redacted]	23	●						PROVIDE NEMA 5-20R RECEPTACLE AT +6" AFF. POWERED THROUGH ITEM #65.
24	1	1/4	-	8	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	7	[redacted] W/ FROST TOP AND DOUBLE-SIDED [redacted] AND CASHIER [redacted] WITH TWIN TRAY SLIDE	24	●						PROVIDE NEMA 5-20R RECEPTACLE AT +6" AFF. POWERED THROUGH ITEM #65.
32	2	-	-	7	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-14 P1K-17	FLOOR [redacted] AND DATA OUTLET	32		●					PROVIDE RECEPTACLE AT +6" AFF.
33	2	-	-	-	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-15 P1K-61	CASH [redacted] & CARD SCANNER	33		●					PROVIDE NEMA RECEPTACLE AT +24" AFF.
34	1	-	-	8	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-2	WALK-IN COOLER/FREEZER	34				●			PROVIDE JUNCTION BOX AT +76" AFF.
35	1	-	-	2	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-1	EVAPORATOR, 34°F	35				●			PROVIDE JUNCTION BOX AT +86" AFF.
36	1	-	-	8	208	3	20	3	3 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-4,6,8	CONDENSER, 34°F	36				●	●		PROVIDE JUNCTION BOX AT +108" AFF.
37	1	-	-	7	208	1	20	2	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-11,13	EVAPORATOR, -10°F	37				●			PROVIDE JUNCTION BOX AT +86" AFF.
38	1	-	-	10	208	3	20	3	3 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-5,7,9	CONDENSER, -10°F	38				●	●		PROVIDE JUNCTION BOX AT +108" AFF.
52	1	-	-	45	208	3	60	3	3 #4 AWG + 1 #8 AWG G IN 1" C.	P1K-24,26,28	[redacted] W/ BOOSTER HEATER	52					●		
53	1	-	-	5	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-27	[redacted] HOOD	53				●			PROVIDE JUNCTION BOX AT +104" AFF.
63	1	1/5	-	3	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-29	AIR [redacted]	63				●			PROVIDE JUNCTION BOX AT +84" AFF.
65	1	-	-	50	208	3	70	3	3 #4 AWG + 1 #8 AWG G IN 1" C.	P1K-30,32,34	NON-MOBILE [redacted] SECTION	65							PROVIDE CIRCUIT BREAKER PANEL(CBP #1), AT 24" AFF. SERVES ITEM #21, #23, AND #24.
67	1	-	-	2	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-2	AIR [redacted] SYSTEM	67	●						PROVIDE RECEPTACLE AT +72" AFF.
68	1	1.5	-	12	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-63	[redacted] HIGH [redacted] WASHER	68	●						PROVIDE RECEPTACLE AT +24" AFF.

NOTES:

1. [redacted] WITH KITCHEN [redacted] AND [redacted] TO [redacted] FOR [redacted] REQUIREMENTS, LOCATIONS, SPECIFICATIONS, DEVICE MOUNTING HEIGHTS AND ASSOCIATED CONDUIT ROUTE AND TERMINATION POINTS PRIOR TO INSTALLATION.
2. [redacted] GFI [redacted] FOR ALL [redacted] IN THE KITCHEN.
3. ALL [redacted] THE KITCHEN [redacted] HOOD MUST BE [redacted] WITH [redacted] TRIP [redacted] AND TIED IN WITH THE HOOD FIRE SUPPRESSION SYSTEM.

SETTY
ONE SOUTH STREET, SUITE 1130
BALTIMORE, MARYLAND 21202
TEL 667-329-8035
MAINTENANCE/ENERGY MANAGEMENT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD SERVICES
CONSULTING • ENGINEERING • PROJECT MANAGEMENT
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
PROJECT NUMBER: SA2017-F-8-F-F

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
GRIMM AND PARKER

GP# 21553

KITCHEN EQUIPMENT ENLARGED PLANS

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

E-4.2

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014