FOUNDATION PLAN NOTES

1. TOP OF SLAB ON GRADE ELEVATION 0'-0" U.N.O VERIFY WITH CIVIL AND/OR ARCHITECTURAL DRAWINGS.
2. SLAB ON GRADE SHALL BE 5" THICK WITH #4 AT 24" EACH WAY 2" CLEAR FROM TOP OF SLAB. FOR METHOD OF PLACING SLAB ON GRADE, SEE 3/S5.01. FOR SLAB SLOPES, DEPRESSIONS, SLAB EDGE ETC. SEE ARCHITECTURAL DRAWINGS.
3. FOR TYPICAL DETAILS, SEE SHEET S5.01. FOR GENERAL NOTES SEE SHEET S1.10.
4. VERIFY ALL DIMENSIONS SHOWN WITH ARCHITECTURAL DRAWINGS.
7. THESE DRAWINGS ARE BASED ON EXISTING AS BUILT STRUCTURAL DRAWINGS BY GB&L CONSULTING ENGINEERS DATED AUGUST 18, 1989.
8. FOR COLD FORMED STEEL DETAILS, SEE SHEET S5.03

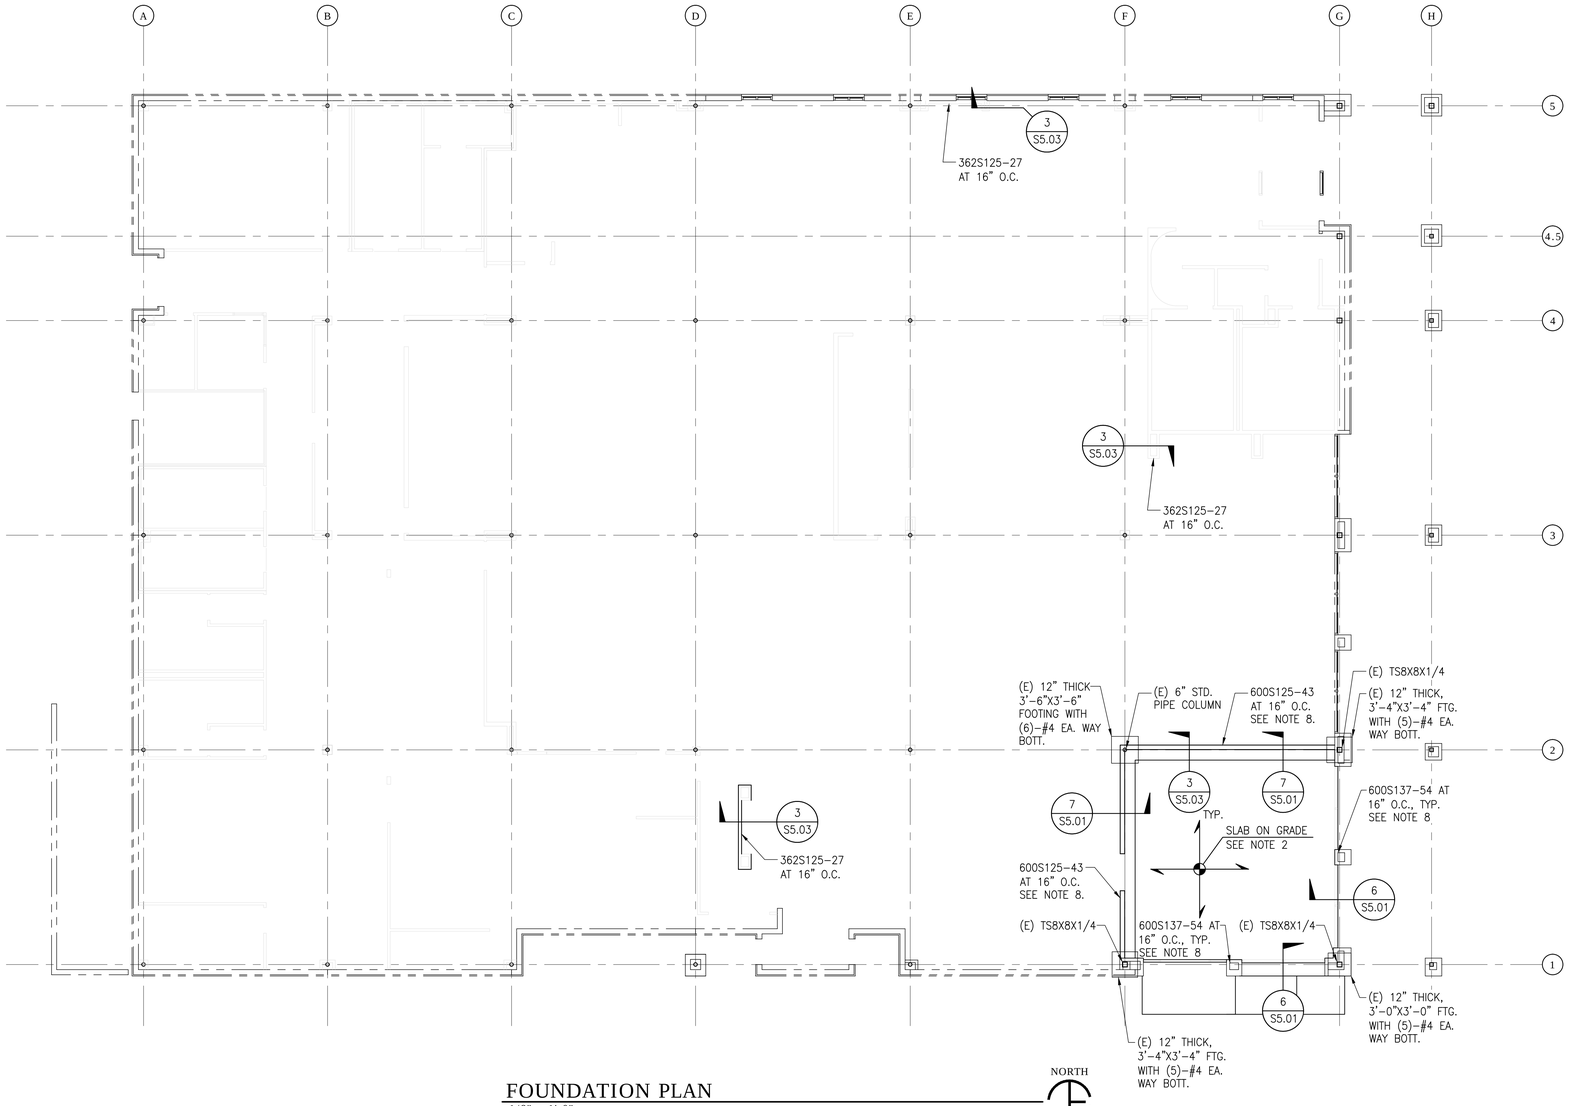

FOUNDATION PLAN
1/8" = 1'-0"

DWL ARCHITECTS + PLANNERS, INC.
2333 N. Central Ave.
Phoenix, AZ 85004
tel 602.264.9731
dwlarchitects.com

THOMAD Engineering LLC
Structural Engineering Consulting
4535 W. RUSSELL ROAD
SUITE 12
LAS VEGAS, NV 89118
TEL (702) 388-7755
FAX (702) 388-7766
www.thomadengr.com

JOB #: 1111

U:\Drawings and Settings\Steven Hydrick\Desktop\CAD Revisions

UNIVERSITY OF NEVADA, LAS VEGAS
ARAMARK - STUDENT DINING COMMONS ALTERATION
4505 S. MARYLAND PARKWAY
LAS VEGAS, NV. 89119

ARAMARK
Innovative Dining Solutions
ARAMARK CORPORATION
ARAMARK INNOVATION CENTER
WANAMAKER BUILDING, 5th FLOOR
PHILADELPHIA, PA 19107

1 REVISIONS 06/06/11
2 PERMIT REVIEW 06/27/11
3 PERMIT REVIEW 07/08/11

CONSTRUCTION DOCUMENTS

© COPYRIGHT 2011
DWL ARCHITECTS + PLANNERS, INC.

KEY:

SHEET TITLE:
FOUNDATION PLAN

SHEET NUMBER:
S2.10

DRAWN BY:	REVIEWED BY:
EK	SN/MT
DATE: 06/06/11	PROJECT NUMBER: 1101.00